


KEY 01A Advanced Warning ROAD CLOSED HERE ON 00/00/00 FOR XX DAYS FROM 00.00 TO 00.00	01	02	04	06	08	10	12	14	16
	ROAD CLOSED	03	05	07	09	11	13	15	17

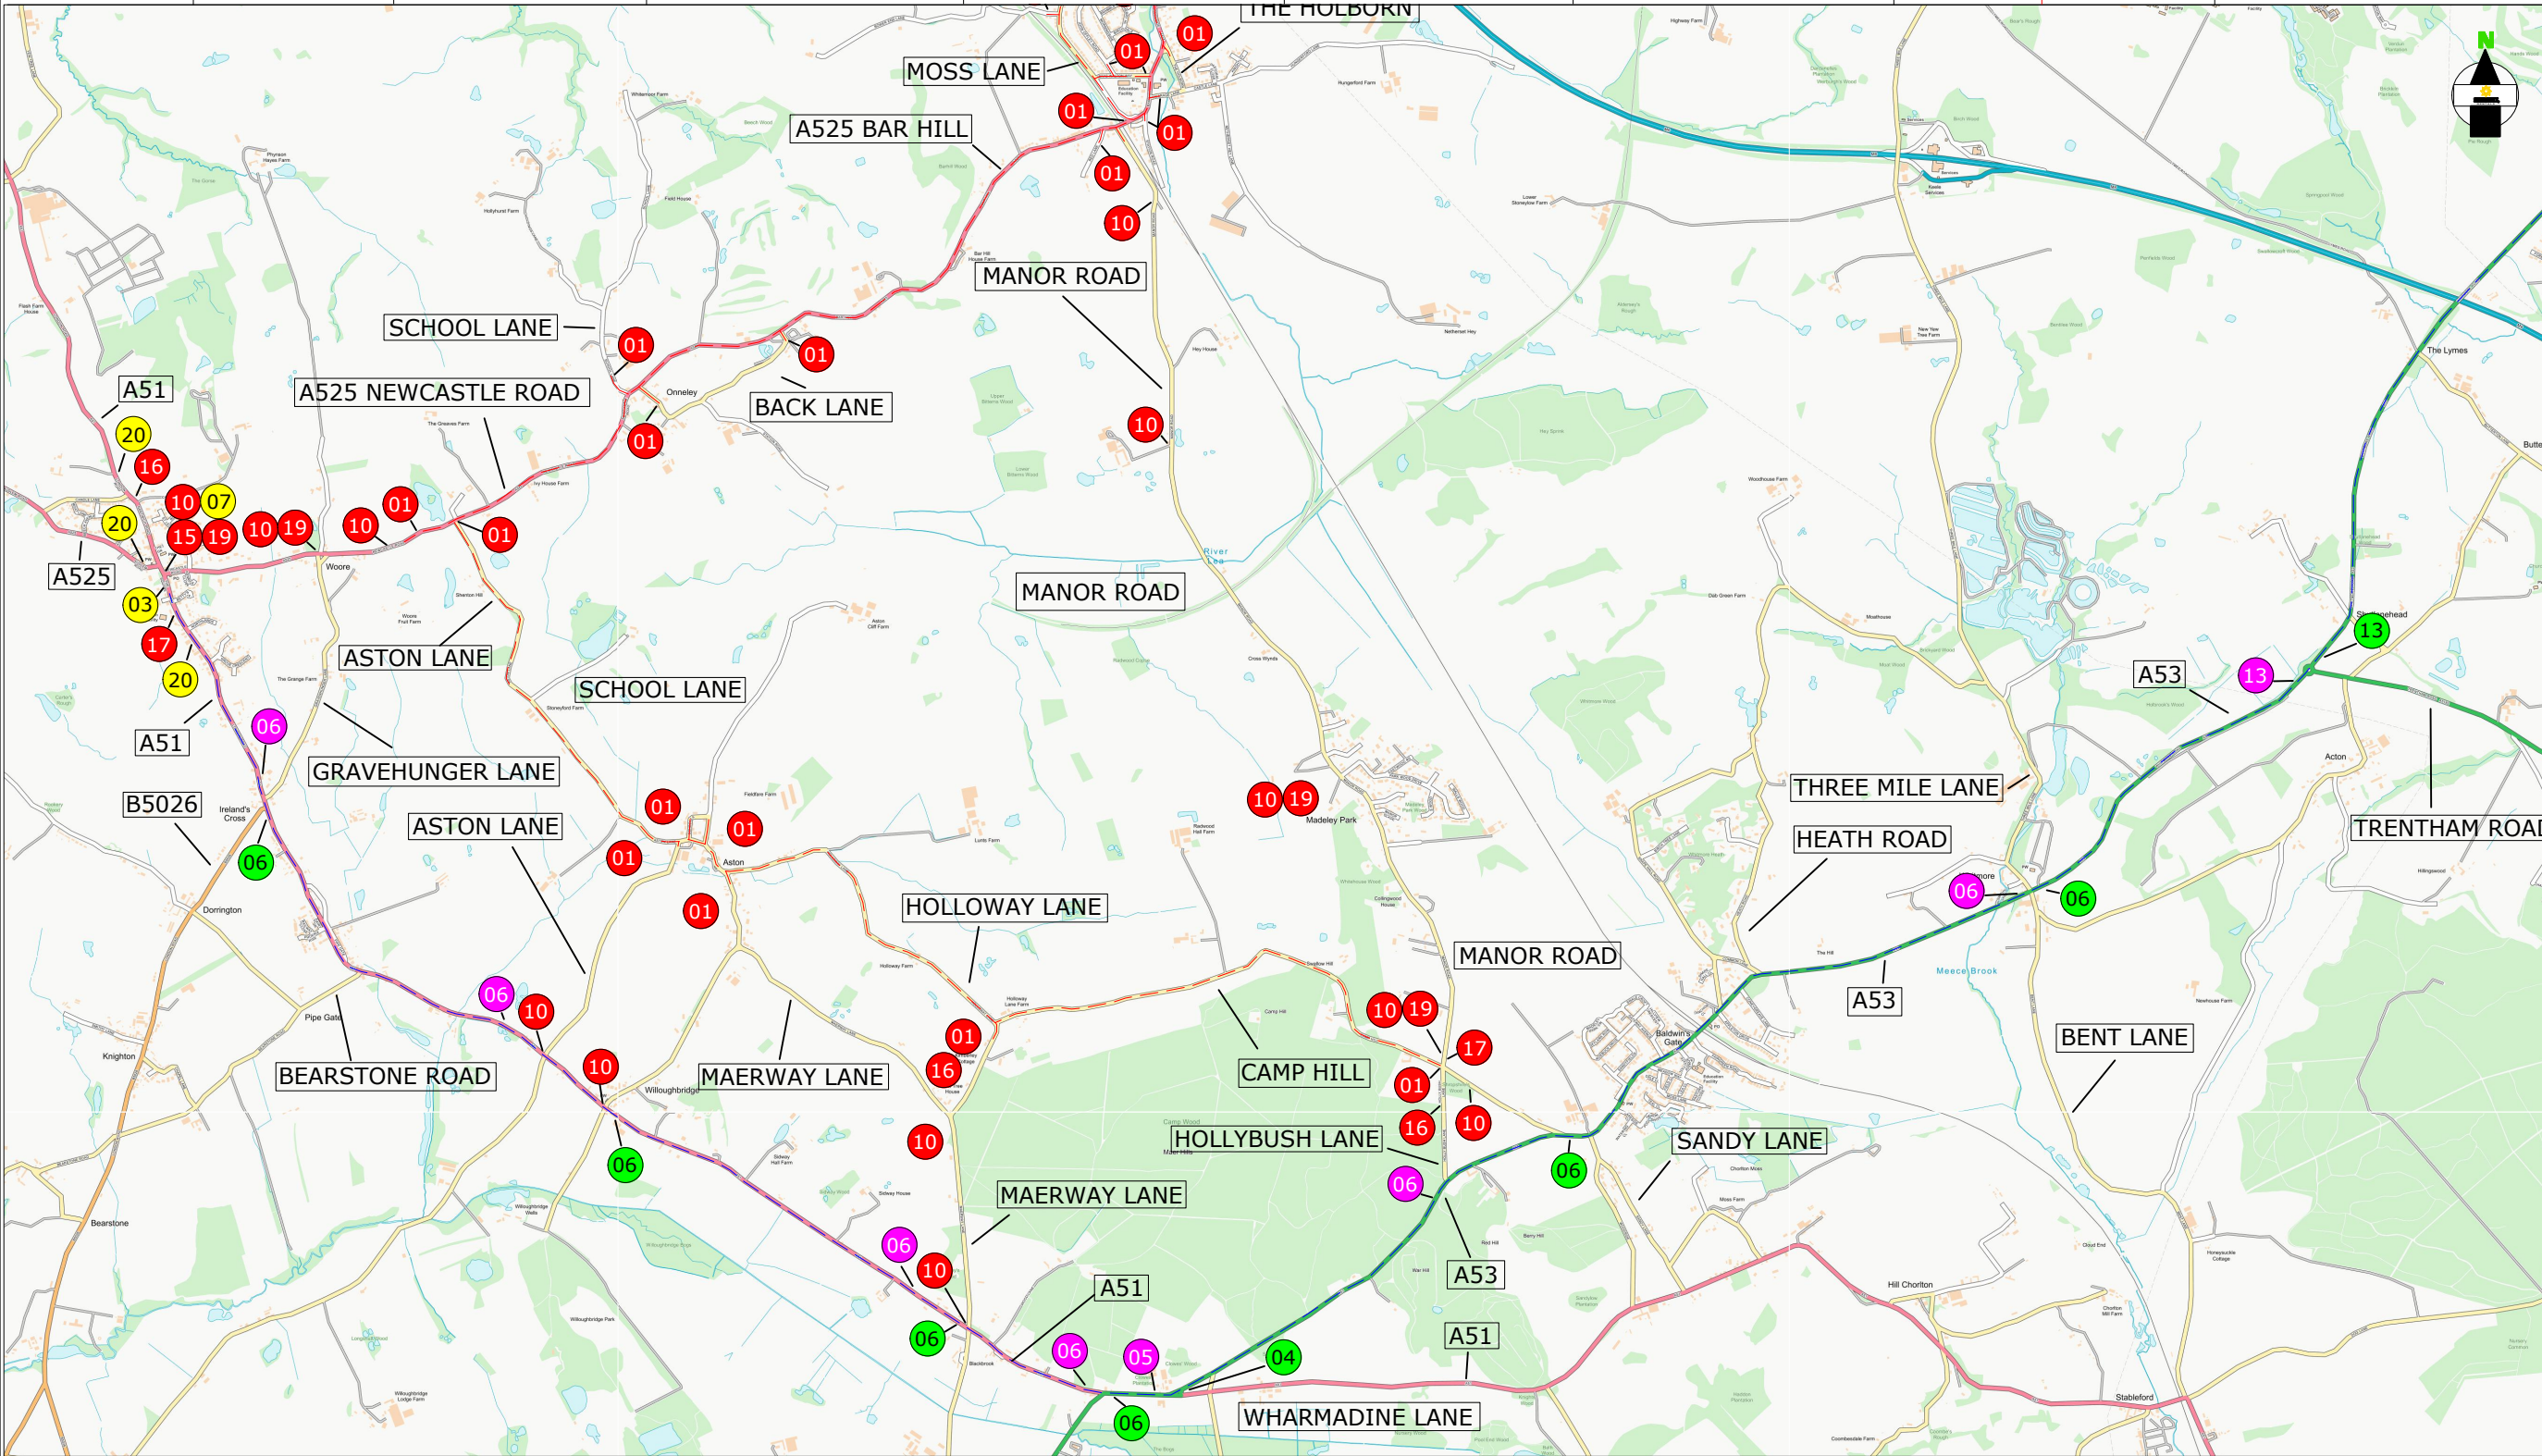

18	CYCLISTS DISMOUNT AND PROCEED WITH CAUTION
19	NO THROUGH ROUTE
	ROAD CLOSURE
	DIVERSION ROUTE
13	CLOCKWISE ROUTE
13	ANTI-CLOCKWISE ROUTE
ROAD CLOSURE LENGTH	00 miles meters
ROAD CLOSURE WIDTH	meters
20	A525 NEWCASTLE ROAD CLOSED AS FAR AS GRAVEHUNGER LANE
21	A525 NEWCASTLE ROAD CLOSED NO ACCESS TO MADELEY

Contract No	Madeley Half	Client: AV Timing/Gold Events
Date	05/01/2024	Site Location / Drawing Title
Drawn by	M Banks	A525 Madeley, CW3
Approved By	xxxxxxxxxx	
Purpose of works	civil works	
Version Number	000	
Amended By	xxxxxxxxxx	
Amendment Date	xx/xx/xxxx	Scale
Sheet No	x of x	OS Licence No
		NOT TO SCALE
		000000000000

DETAIL A (A)
 Prescribed sign to Diagram 610 above and behind cones

Running lane(s) Three only close spaced 750mm or 1m high traffic cones

Hard Shoulder 45°

Verge 45°

Notes:
 1) During darkness, a single warning light to BS EN 12352:2006 should be provided.
 2) Traffic cones should conform to diagram 7101.1 and to BS EN 13422.

The information in this drawing may not be copied or used by third parties without written consent from Sunbelt Rentals Ltd (Traffic Management), this layout is for installation by NRSWA, Lantra 12A, 12B, 12C, 12D qualified persons.

DETAIL B (B)

Single/Dual carriageway 40mph or less - 450mm traffic cones, spacing 1.5m.
 Single/Dual carriageway 50mph or more - 750mm traffic cones, spacing 1.5m.
 Dual carriageway national speed limit - 750mm traffic cones, spacing 1.5m, relaxation 3m.

Notes:
 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
 2) 45° tapers have 1.2m spacing, no relaxations.
 3) On motorways and NSL, AP duals with hard shoulders, 1m cones will be required for both standard and relaxation works for lead tapers and the facing wall of lane changes.

DETAIL C1 (C1)

Single/Dual carriageway 40mph or less - 450mm traffic cones.
 Single/Dual carriageway 50mph or more - 750mm traffic cones.

Notes:
 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
 2) For relaxation to Detail C1 see Table A1.3 (Appendix 1).

DETAIL C2 (C2)

Single carriageway 40mph or less - 450mm traffic cones.
 Single/Dual carriageway 50mph or more - 750mm traffic cones.

Notes:
 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
 2) Detail D applies only to relaxation cases.

DETAIL AL (AL)
 Manned Airlock system.

Notes:
 1) Minimal site traffic 25 - 30m air lock is sufficient, Extend airlock for larger work vehicle flow.
 2) Road lamps to be used on Nissen Barrier (all HE networks)

THIS DOCUMENT IS UNCONTROLLED WHEN PRINTED
 The electronic version of this document is the approved and most current. Any printed version is uncontrolled and may not be current.

SUNBELT RENTALS
 Sunbelt Rentals UK (Traffic Management)
 Kemble Airfield Enterprise Park, Cirencester Road,
 Kemble GL7 6BQ
 Telephone: 0370 050 0792